


Installation and User Instructions

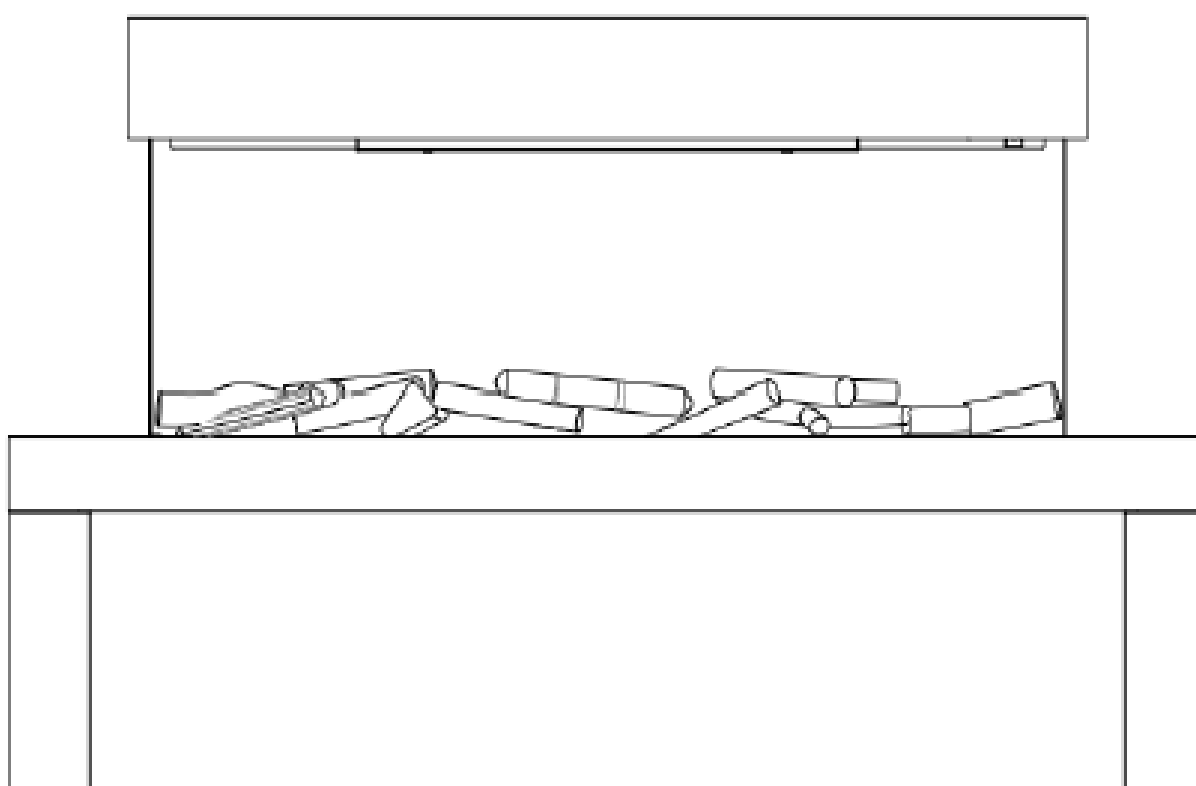

Model: E128S Fireplace Mantle

For use with E120R – 2KW Electric Fire


**PLEASE READ THIS MANUAL BEFORE INSTALLING AND USING APPLIANCE.
INSTALLER: DO NOT DISCARD THIS MANUAL – LEAVE WITH THE CUSTOMER.
SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.
SCAN THE QR CODE TO GET THE INSTALLATION VIDEO.**

Appliance Development Services Ltd

Tel 0172¹ 3 583227

SECTION 1 DIMENSIONS

Dimensions in mm

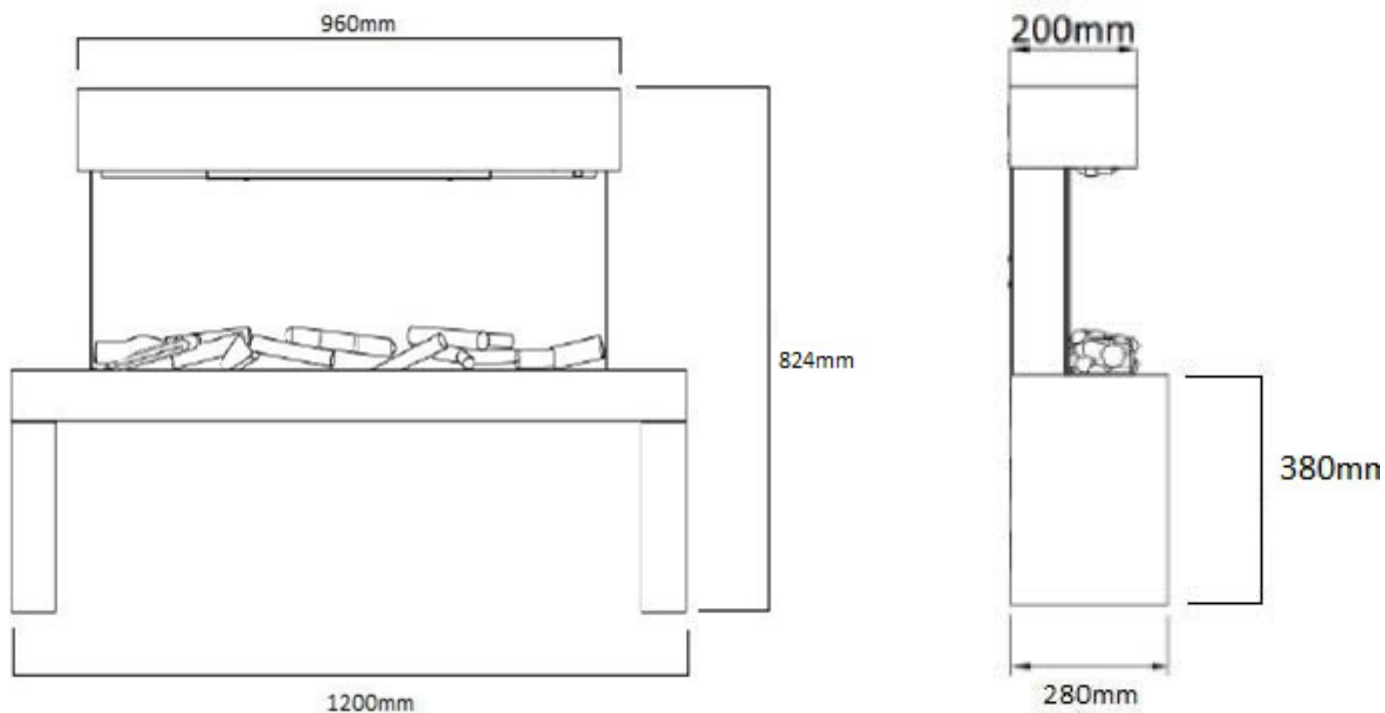


SECTION 2 ASSEMBLY AND INSTALLATION

2.1 Unpack

- Open the package carefully and remove all pieces. Carefully inspect each part for any damage before you begin assembly.
- Make sure that you have all the parts listed below before assembling.
- Retain packaging for future transport and/or storage.


Name	Quantity
Top plinth	1
Bottom plinth	1
legs	2

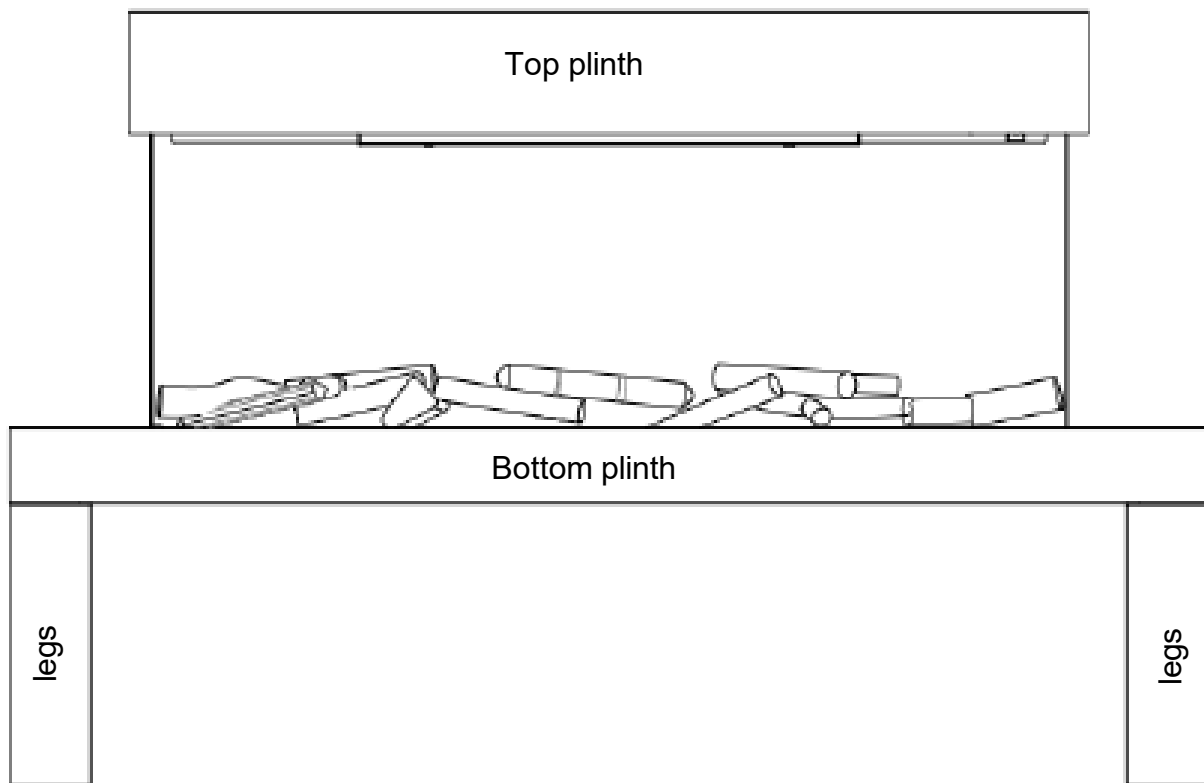

NOTE: left and right of product are distinguished by its front view.

2.2 before installation


Tools required: Magnetic Phillips screwdriver




2.3 Installation

NOTE!

- Assembly required by two adults.
- This fireplace suite must be fitted to the wall. For directions on this please follow the instructions included with the fire. **Do not use any silicon-based sealant.**
- To avoid over tightening, **do not use** an electric screwdriver.
- Use washers when fixing with screws. **Do not** over tighten bolts.
- Only use the screws supplied with this mantel.

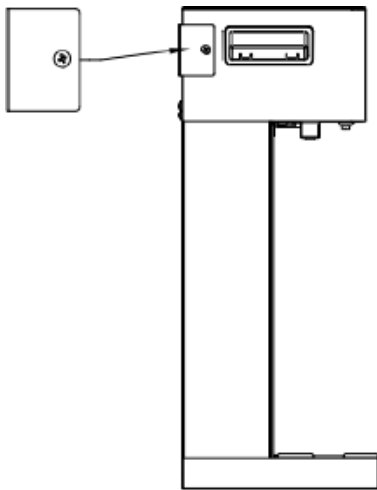


1. Open the fire carton and take out the product (retain all packaging) Unscrew the wall mounting bracket that is fixed on the upper left and right side of the fire by 2 screws.

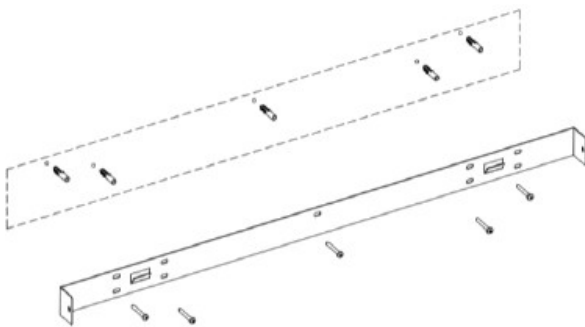


2. Locate position of mounting bracket by measuring up from the floor 750 mm to it's lower edge. Mark the position of 5 screw holes (2 either side and 1 centre) and drill them using a suitable sized drill bit for the raw plugs supplied.


3. Push the plastic raw plugs into the five holes or use a suitable fixing for plasterboard walls. Then use the ST5*40 screws to attach the bracket onto the wall.

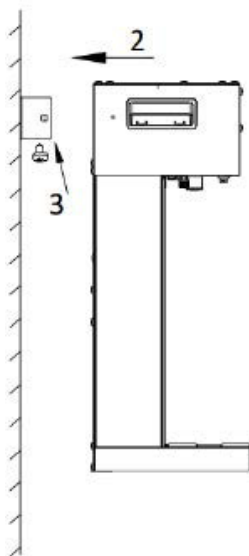


4. Hook the fire back on the bracket, and using the ST4*8 screws (put to a side in step one) and attach the bracket to the fire.

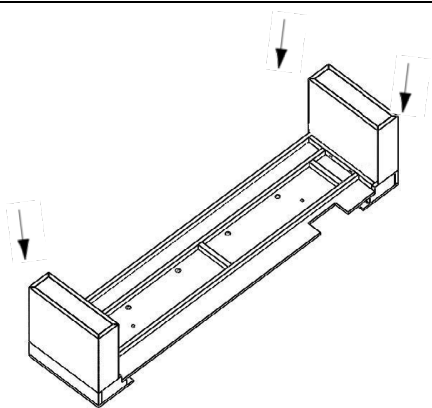


5.. slot the lower leg sections onto the base of the fire This is best done placing the lower wooden section upside down on a soft clean surface.

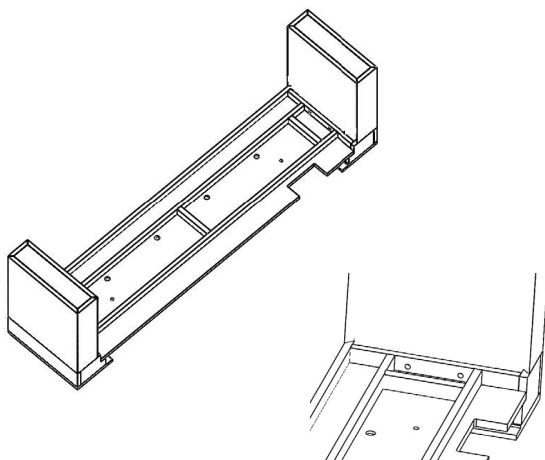

6. Fix two screws on both sides.

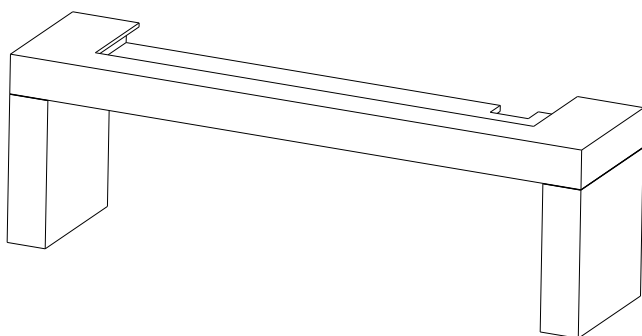

7. Finish the assembly of the lower wood mantle set.

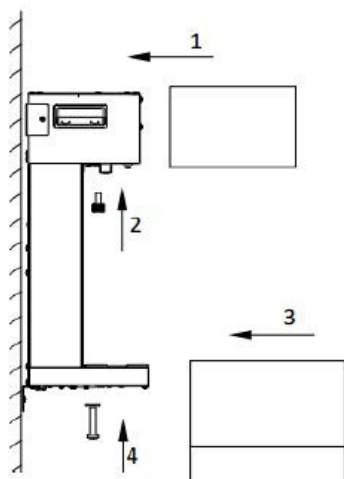

8. Take out the upper wooden section and slide it on to the top section of the fireplace. Use the two M5*12 thumb screws to fix on both sides of the fireplace. (These are included in the fire screw pack) Slide the lower wooden section on to the lower section of the fireplace. Put the washers on to the two M5*25 screws and use them to secure the lower section in place.

SECTION 3 CLEANING & MAINTAINENCE

Your mantel surface coating will give off a slight odour for a brief initial period. Try to ventilate as much as possible during this time.

Daily cleaning:

- Clean the mantel surfaces with a soft, lint-free cloth.
- Do not use cleaning or polishing products

Avoid

- Long-term direct sunlight.
- Excessive temperatures and humidity to protect the life of your furniture surface
- Do not put heavy or sharp objects on this mantel